


7300 SERIES POWER CENTER

- *Filtered DC Power*
- *Quiet Operation*
- *Extensive AC/DC Distribution*
- *Two Year Warranty*
- *Outputs Available: 45, 55
and 65 Amps*



*The electronic
converter/charger
provides reliable
battery charging
and filtered output.*

The Parallax power center concept -- combining power conversion, battery charging, and AC/DC distribution -- is a benchmark for RV power supplies. The clean DC output is ideal for powering today's electronically controlled appliances and accessories. 7300 Series power is free from "spikes" and "surges", regardless of AC power source stability. Smooth appliance operation and bright flicker-free lighting are benefits end-users appreciate. The full output rating is available for battery charging, virtually eliminating dead or drained batteries.

The 7300 Series features a whisper quiet cooling fan, resulting in nearly inaudible operation. FCC Class B certification attests that the 7300 minimizes signal interference with televisions, radios and emergency channels.

Two-step battery charging is available on some models, providing more expedient battery recharging. The ideal charge is maintained through long term periods such as off-season storage and extended park stays.



**The Power To Bring
People & Places
Together.**

UL/CUL Listed


**CTL Enclosed
Panel Board Listing**

**Whisper Quiet
Operation**

**Battery Charging at
Full Output Rating**

**FCC Class B
Certification**


Typical Installation

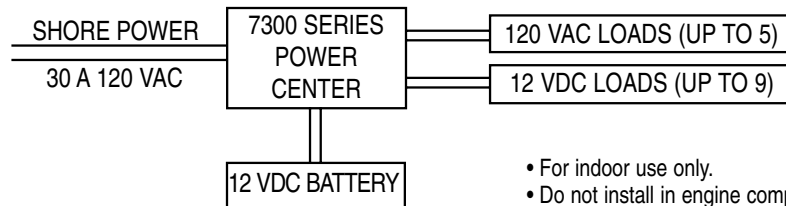

- For indoor use only.
- Do not install in engine compartment.


Output Load Curve (Typical 7355 model)

Typical load curve: With no load, output voltage is 13.8 VDC nominal to recharge a 12-volt battery to 100%.



Output Load Curve (Typical 7355T model)

Option T only: Two-step charging provides efficient recharge and long term float service without over-charging.



7300 Series Specifications

Model Number	Item Description	AC Input Volts	AC Branches	DC Output Volts	DC Output Amps	Dimensions	Dimensions	Dimensions	Dimensions	UPC No.
						Ht.	Wdth.	Depth	Wt.	1-80347-
7345	Power Center with 45 ADC Converter/Charger	120	5	14.0 max. @ no load 13.2 max. @ full load	45	11-3/4"	14"	7"	20 lbs.	00010-6
7345A	Power Center with ATS & 45 ADC Converter/Charger	120	5	14.0 max. @ no load 13.2 max. @ full load	45	11-3/4"	14"	7"	23 lbs.	00012-0
7345T	Power Center with Timer & 45 ADC Converter/Charger	120	5	14.2 max. @ no load 13.6 max. @ full load	45	11-3/4"	14"	7"	20 lbs.	00016-8
7345R	45 ADC Converter/Charger Lower Section Only	N/A	N/A	14.0 max. @ no load 13.2 max. @ full load	45		N/A		11 lbs.	00018-2
7345P	Power Center with Plug/Play & 45 ADC Converter/Charger	120	5	14.0 max. @ no load 13.2 max. @ full load	45	11-3/4"	14"	7"	20 lbs.	00022-9
7355	Power Center with 55 ADC Converter/Charger	120	5	14.0 max. @ no load 13.2 max. @ full load	55	11-3/4"	14"	7"	20 lbs.	00024-3
7355A	Power Center with ATS & 55 ADC Converter/Charger	120	5	14.0 max. @ no load 13.2 max. @ full load	55	11-3/4"	14"	7"	23 lbs.	00026-7
7355R	55 ADC Converter/Charger Lower Section Only	N/A	N/A	14.0 max. @ no load 13.2 max. @ full load	55		N/A		11 lbs.	00028-1
7355P	Power Center with Plug/Play & 55 ADC Converter/Charger	120	5	14.0 max. @ no load 13.2 max. @ full load	55	11-3/4"	14"	7"	20 lbs.	00032-8
7355T	Power Center with Timer & 55 ADC Converter/Charger	120	5	14.2 max. @ no load 13.6 max. @ full load	55	11-3/4"	14"	7"	20 lbs.	00008-3
7365	Power Center with 65 ADC Converter/Charger	120	5	14.0 max. @ no load 13.2 max. @ full load	65	11-3/4"	14"	9"	20 lbs.	00034-2
7365R	65 ADC Converter/Charger Lower Section Only	N/A	N/A	14.0 max. @ no load 13.2 max. @ full load	65		N/A		11 lbs.	00036-6
7365P	Power Center with Plug/Play & 65 ADC Converter/Charger	120	5	14.0 max. @ no load 13.2 max. @ full load	65	11-3/4"	14"	9"	20 lbs.	00038-0



Sales Office
425 Sycamore Street
Anderson, IN 46016
800-443-4859 • Fax 765-608-5036
www.parallaxpower.com

Specifications subject to change without notice.
Corporate Office
5508 128th Street E.
Puyallup, WA 98373